


# Probability and Statistics

Alvin Lin

Probability and Statistics: January 2017 - May 2017

## Binomial Random Variables

There are two balls marked S and F in a basket. Select a ball 3 times with replacement. At each trial, S is likely to be chosen with probability  $p$ , and F is likely to be chosen with probability  $1 - p$ . Let  $X$  be the random variable of the experiment indicating the number of times S is chosen.

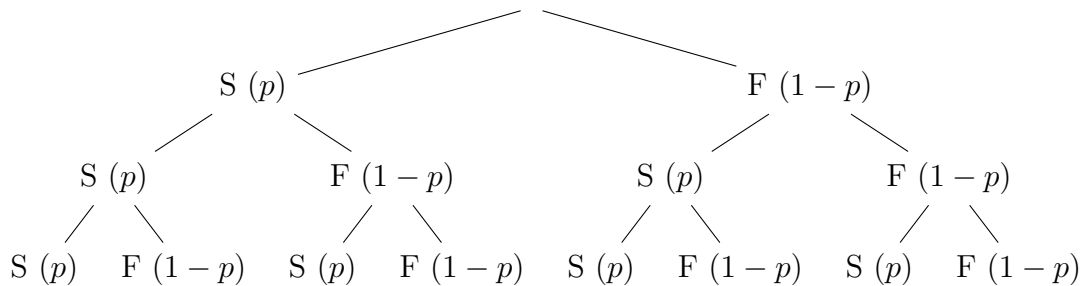

	$X = 1$	$X = 2$
SSS		
SSF		✓
SFS		✓
SFF	✓	
FSS		✓
FSF	✓	
FFS	✓	
FFF		

Find the probability mass function of  $X$ ,  $b(x; 3, p)$ :

$$b(0; 3, p) = P(X = 0) = (1 - p)^3$$

The underlying assumption is on the independence of the events:

- $A_1$ : getting an S in the first trial
- $A_2$ : getting an S in the second trial
- $A_3$ : getting an S in the third trial

$A_1$ ,  $A_2$ , and  $A_3$  are mutually independent.

$$\begin{aligned}
 b(0; 3, p) &= P(X = 0) \\
 &= (1 - p)(1 - p)(1 - p) \\
 &= \binom{3}{0} p^0 (1 - p)^{3-0} \\
 b(1; 3, p) &= p(1 - p)(1 - p) + (1 - p)p(1 - p) + (1 - p)(1 - p)p \\
 &= \binom{3}{1} p^1 (1 - p)^{3-1}
 \end{aligned}$$

From 3 distinct items (trial 1, trial 2, trial 3), select 1 item. There are  ${}_3C_1$  possible combinations.

$$\begin{aligned}
 b(2; 3, p) &= P(X = 2) \\
 &= (p)(p)(1 - p) + p(1 - p)p + (1 - p)(p)(p) \\
 &= \binom{3}{2} p^2 (1 - p)^{3-2} \\
 b(x; 3, p) &= \begin{cases} \binom{3}{x} p^x (1 - p)^{3-x} & , x = 0, 1, 2, \dots, n \\ 0 & , otherwise \end{cases}
 \end{aligned}$$

The above example is an example of a binomial experiment with a binomial random variable.

1. This experiment consists of a sequence of  $n$  smaller experiments called trials, where  $n$  is fixed in advance of the experiment.
2. Each trial can result in one of the two possible outcomes (dichotomous trials), which we generically denote by *success*( $S$ ) or *failure*( $S$ ). The assignment of the  $S$  and  $F$  labels to the two sides of the dichotomy is arbitrary.
3. The trials are independent, so that the outcome on any particular trial does not influence the outcome of any other trial.

4. The probability of success  $P(S)$  is constant from trial to trial. We denote this probability by  $p$ .

An experiment for which the above conditions (a fixed number of dichotomous, independent, homogeneous trials) are satisfied is called a binomial experiment.

## PMF of a binomial random variable $X$

The probability mass function of a binomial random variable  $X$  is:

$$b(x; n, p) = \begin{cases} \binom{n}{x} p^x (1-p)^{n-x} & , x = 1, 2, 3, \dots, n \\ 0 & , otherwise \end{cases}$$

The value of  $X$  indicates the number of S's.

## CDF of a binomial random variable $X$

The cumulative distribution function of a binomial random variable  $X$  is:

$$\begin{aligned} B(x; n, p) &= P(X \leq x) \\ &= \sum_{y=0}^x b(y; n, p) \\ & \text{if } x = 0, 1, 2, \dots, n \end{aligned}$$

$X \sim \text{Bin}(n, p)$  denotes that  $X$  is a binomial random variable with probability mass function  $b(x; n, p)$ .

## Expected value of a binomial random variable $X$

$$E(X) = \sum_{x \in \{0, 1, 2, \dots, n\}} x b(x; n, p) = np$$

## Variance of a binomial random variable $X$

$$V(X) = \sum_{x \in \{0, 1, 2, \dots, n\}} (x - E(X))^2 b(x; n, p) = np(1-p)$$

The standard deviation of  $X$  is  $\sigma = \sqrt{V(X)} = \sqrt{np(1-p)}$

## Example

An aircraft seam requires 25 rivets. The seam will have to be reworked if any of these rivets are defective. Suppose rivets are defective independently of one another, each with the same probability. If 15% of all seams need reworking, what is the probability that a rivet is defective?

$$\begin{aligned}1 - 0.15 &= P(\text{a seam does not need reworking}) \\ &= P(\text{a seam has zero defective rivets}) \\ &= (1 - p)^{25} \\ 1 - p &= 0.85^{\frac{1}{25}} \\ p &= 1 - 0.85^{\frac{1}{25}}\end{aligned}$$

Find the probability that a randomly selected seam has exactly 3 defective rivets.

$$\binom{25}{3} p^3 (1 - p)^{22}$$

## Example

A very large batch of components has arrived at a distributor. The batch can be characterized as acceptable only if the proportion of defective components is at most 0.10. The distributor decides to randomly select 10 or 15 components and to accept the batch only if the defective components in the sample is at most 1 or 2, respectively.

Consider a simpler experiment. Select 2 components and inspect them. The probability that the two are both defective is:

$$\left(\frac{k}{N}\right)\left(\frac{k-1}{N-1}\right)$$

where  $k$  is the number of defective components in the batch. If  $N$  and  $k$  are large:

$$\frac{k-1}{N-1} \sim \frac{k}{N}$$

Consider sampling without replacement from a dichotomous population of size  $N$ . If the sample size (number of trials)  $n$  is at most 5% of the population size. The experiment can be analyzed as though it were a binomial experiment.

Trial: select a component from the batch and inspect the component for defects.

$$p = \frac{k}{N}$$

where  $k$  is the number of defective components in the batch and  $X$  is the number of defective components in the  $n$  trials. In the real world, we do not replace a component after inspecting it, but we can approximate it for the purpose of this experiment.

$$X \sim \text{Bin}(10, p)$$

$$P(X \leq 2) = \sum_{x=0}^2 b(x; n, p)$$

$$= \sum_{x=0}^2 \binom{n}{x} p^x (1-p)^{n-x}$$

*Method 1 :  $n = 10$*

$p = \frac{k}{N}$	0.01	0.02	0.1	0.2	0.25
$P(X \leq 2)$	0.999	0.9985	0.9298	0.6778	0.5256

*Method 2 :  $n = 10$*

$p = \frac{k}{N}$	0.01	0.02	0.1	0.2	0.25
$P(X \leq 1)$	0.9957	0.9139	0.7361	0.3758	0.2440

*Method 3 :  $n = 15$*

$p = \frac{k}{N}$	0.01	0.02	0.1	0.2	0.25
$P(X \leq 2)$	0.9996	0.9638	0.8159	0.3980	0.2361

Which method is the best? Our goal is that the batch is accepted if  $p \leq 0.10$  and rejected if  $p > 0.10$ .

$p = \frac{k}{N}$		0.10	
$P(\text{the event such that we accept the batch})$	high		low

The third method is the best.

You can find all my notes at <http://omgimanerd.tech/notes>. If you have any questions, comments, or concerns, please contact me at [alvin@omgimanerd.tech](mailto:alvin@omgimanerd.tech)